
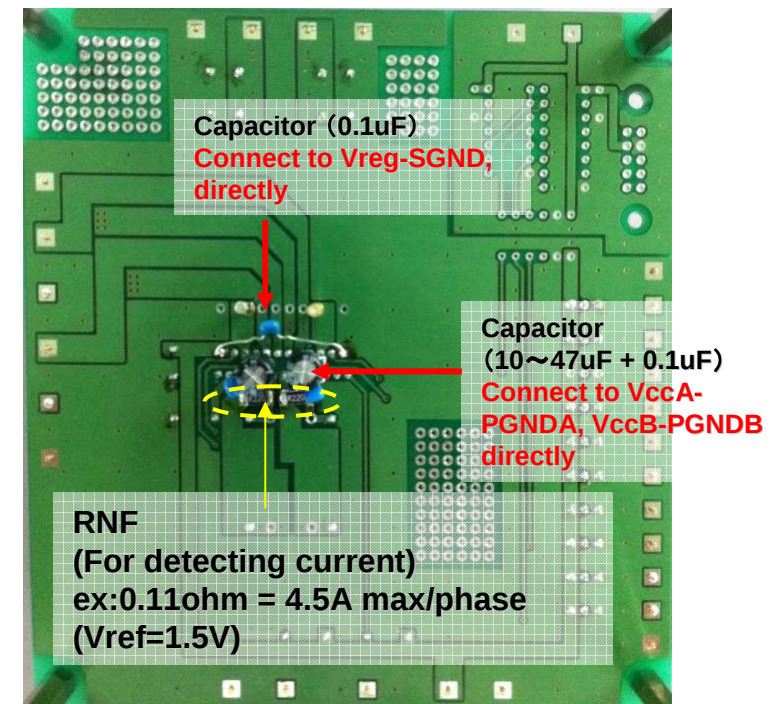


TB6600HQ Evaluation board

2011/09/17
Toshiba

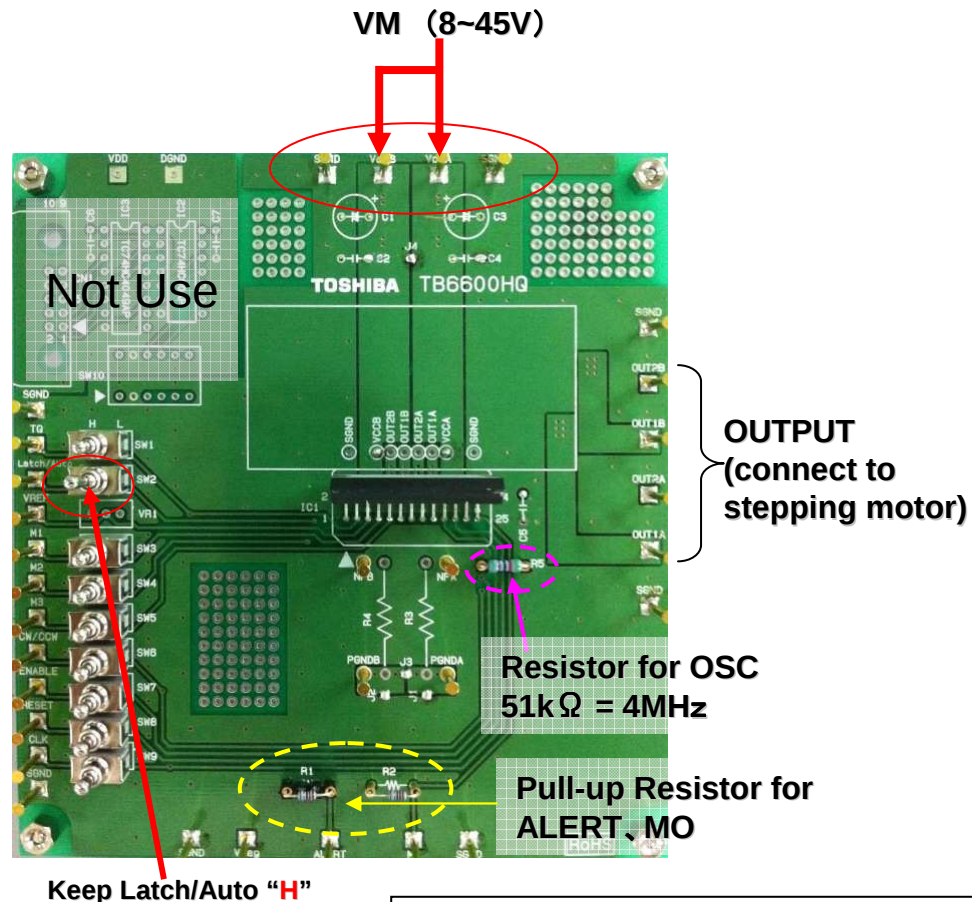

<Start>

1. ENABLE and CLK should be set to Low
2. 8~45V applied to VccA and VccB
3. ENABLE set to High
4. Input CLK pulse

<Stop>

1. ENABLE set to Low
2. Turn off Vcc

